


CHQ-SZM2/M(SCI)

Marine Approved Analogue Single Zone Module with SCI

Features

- ▶ Single Loop Address
- ▶ Up to 6 Conventional Detectors
- ▶ Remote LED output
- ▶ Fully monitored for short and open circuit faults
- ▶ DIN rail version available
- ▶ Both models feature an integral short-circuit isolator
- ▶ Both models approved by LPCB & VdS
- ▶ Approved to MED by GL
- ▶ GL Type approval

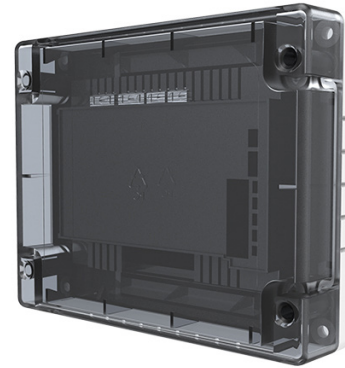

Description

Model CHQ-SZM2/M(SCI) is a Single Zone Monitor designed to allow up to 6 conventional detectors to be interfaced to Hochiki's ESP analogue addressable system. The unit is also available as a DIN Rail mountable version; with or without an integral short-circuit isolator. The CHQ-SZM2/M(SCI) utilises simple DIL switches for reliable addressing. A back box is also available (CHQ-BACKBOX) which, when used in conjunction with the CHQ-SZM/M(SCI), increases the IP rating to IP65.

The conventional zone on the CHQ-SZM2/M(SCI) does not support any line continuity options; if Call Points are being interfaced they should be wired at the beginning of the zone.

Specification

Operating Voltage	17 ~ 41 VDC		
Quiescent current	360 μ A		
Current consumption	22 mA \pm 20 % (polling)		
Current in short-circuit	8 mA		
Maximum short-circuit current	1 A		
E.O.L device	TE-RH-E (polarity conscious)		
Zone voltage	15.3 V - 17.1 V		
Zone resistance	50 Ω (Max)		
Zone capacitance	0.3 μ F (Max)		
Detectors per zone	DCA, DFB, DFE – No limit. SLG, SLK, SLR, SIF, SIH, SIJ, DCC, DCD, DFJ – 6 max. SPB-ET, SPC-ET – Only one and no other detectors. DRD-E – 3 max, CCP-E – No limit		
Operating Temperature Range	-10 $^{\circ}$ C to +50 $^{\circ}$ C		
Storage Temperature Range	-30 $^{\circ}$ C to +60 $^{\circ}$ C		
Maximum Humidity	95% RH Non Condensing (at 40 $^{\circ}$ C) Weights		
Weights (g) & Dimensions (mm)	CHQ-SZM2(SCI)	328	L=157 x W=127 x D=35 (module inc lid) D=79 (module inc lid & CHQ-BACKBOX) (add 235 to module weight when using CHQ-BACKBOX)
	CHQ-SZM2/DIN(SCI)	114	L=119 x W=108 x D=24
Colour & enclosure material	CHQ Module & CHQ-BACKBOX White ABS, DIN Module Green ABS, Module Lid Semi-Opaque Black ABS as standard (white version – CHQ-LID(WHT) also available)		

*Fire alarm control panel compatibility required for these products.

Ordering Codes

Product

Marine Approved Analogue Single Zone Module with SCI

Part Number

CHQ-SZM2/M(SCI)



For further information visit www.hochikieurope.com/marine

Hochiki Europe (UK) Ltd. Reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki Europe (UK) Ltd. To be a complete and up-to-date description.